

Features

- ◇ Flexible connection to suction cup, perfectly fit for workpiece with inclined surface.
- ◇ The rotating joint is vulcanized by high-strength metal and high-performance rubber, which guarantees strength, elasticity and sealability, and can be automatically reset.
- ◇ Suitable for handling workpiece with inclined surface.



How to order

PJE - G2F - G2M
 ① ② ③

① Series

PJE


② Connection thread 1

G2M - G1/4 Male thread
G2F - G1/4 Female thread
G4M - G1/2 Male thread
G4F - G1/2 Female thread

③ Connection thread 2

M10M - M10x1.25 Male thread
G2M - G1/4 Male thread
G4M - G1/2 Male thread

Dimensions(mm)

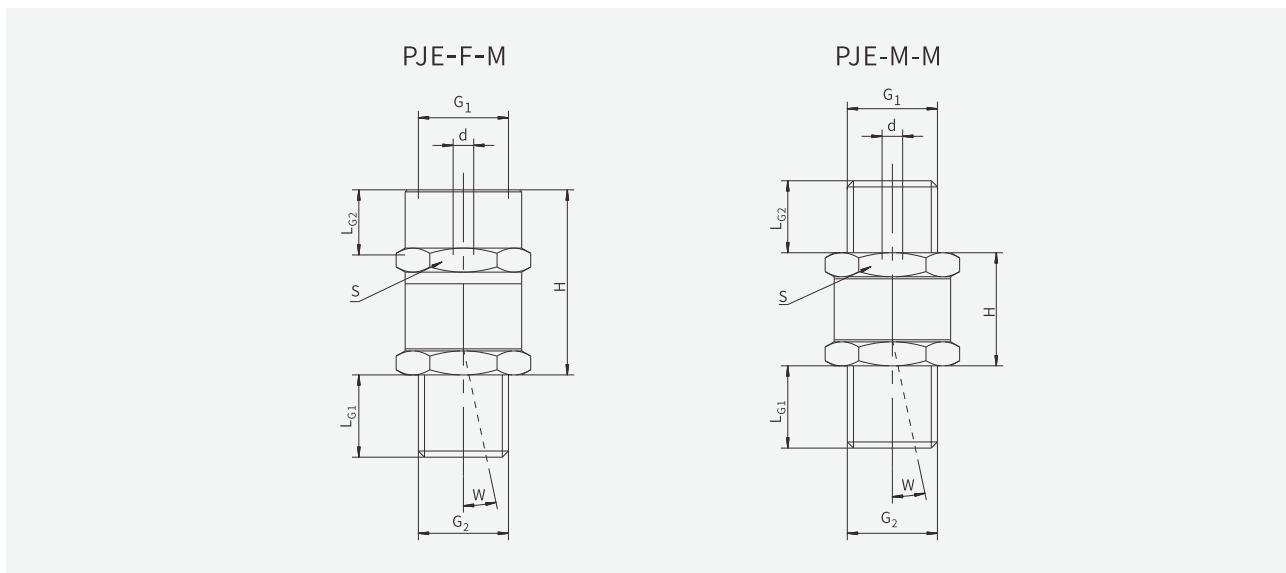

Model	H	G_1	G_2	L_{G1}	L_{G2}	d	S	W
PJE-G2F-M10M	27	G1/4	M10x1.25	12	8	3	17	12°
PJE-G2F-G2M	27	G1/4	G1/4	12	12	3	17	12°
PJE-G2M-G2M	16.5	G1/4	G1/4	10.5	12	3	17	12°
PJE-G4F-G4M	33.5	G1/2	G1/2	14	14	6	27	12°
PJE-G4M-G4M	21	G1/2	G1/2	14	14	6	27	12°