

Features

- ◇ Flexible connection for deflection in any direction with a maximum deflection angle of 12°.
- ◇ High-strength steel with good stability.



How to order


PJB - G4M

①

②

① Series	② Connection thread
PJB	G1M - G1/8 Male thread M10M - M10×1.25 Male thread G2M - G1/4 Male thread G4M - G1/2 Male thread

Dimensions(mm)

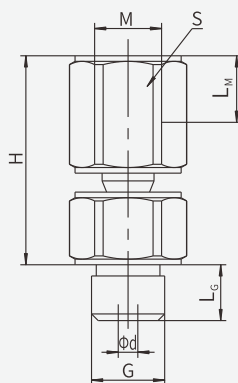

Model/Size	H	G	L _G	M	L _M	S	Φd	Max. deflection	Weight (g)
PJB-G1M	26.5	G1/8	7	G1/8	8	12	2	12°	20
PJB-M10M	37.5	M10X1.25	10	G1/4	12	19	3.5	12°	82
PJB-G2M	37.5	G1/4	10	G1/4	12	19	3.5	12°	75
PJB-G4M	40	G1/2	12	G1/2	15	24	4	12°	113

How to order


PJB - G4M - S

① ② ③



① Series	② Connection thread	③ Sealing device
PJB	G1M - G1/8 Male thread G4M - G1/2 Male thread	S - With suction cup

Dimensions(mm)

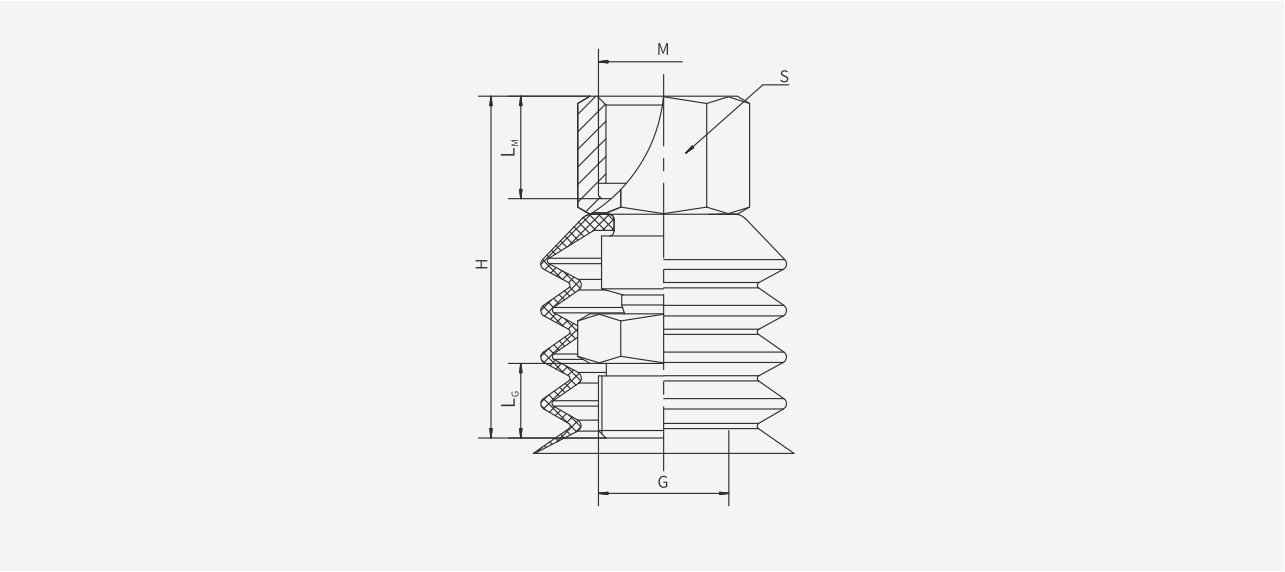

Model/Size	H	G	L _G	M	L _M	S	Max. deflection	Weight(g)
PJB-G1M-S	33	G1/8	7	G1/8	8	12	12°	21
PJB-G4M-S	52	G1/2	12	G1/2	15	24	12°	123