

Features

- ◇ Ball clamp structure with adjustable height and angel for workpiece with irregular surface.
- ◇ Made of high-strength aluminum alloy and light duty.





How to order

PJH - 1 A 80

① ② ③ ④

① Series	② Mounting thread	③ Connection thread	④ Length of connecting rod
PJH	1 - 1×M5 Fixed screw 2 - 2×M6 Fixed screw	A - G1/4 B - G3/8	80 - 80mm 100 - 100mm 140 - 140mm 200 - 200mm

Dimensions(mm)

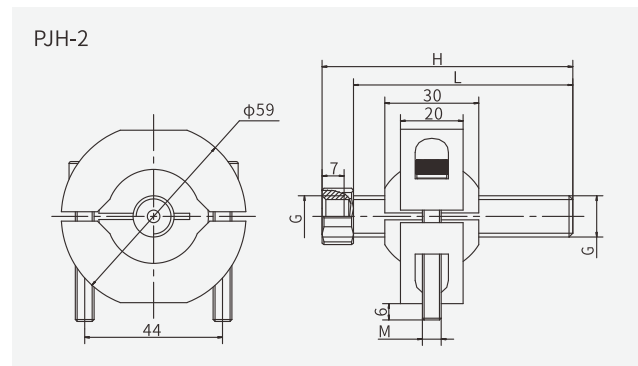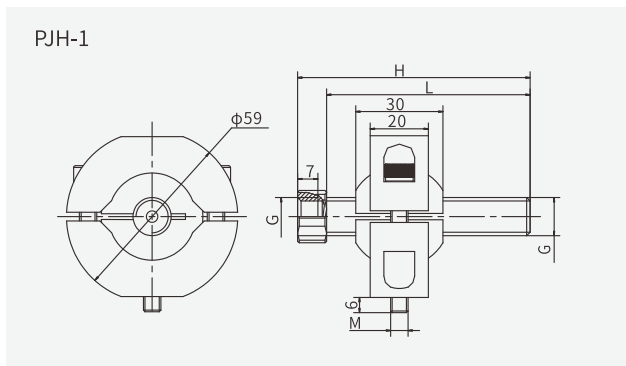

Model	G	M	H	L	Max. deflection
PJH-1A80	G1/4	M5	80	70	15°
PJH-1A100	G1/4	M5	100	90	15°
PJH-1A140	G1/4	M5	140	130	15°
PJH-1A200	G1/4	M5	200	190	15°
PJH-1B80	G3/8	M5	80	70	15°
PJH-1B100	G3/8	M5	100	90	15°
PJH-1B140	G3/8	M5	140	130	15°
PJH-1B200	G3/8	M5	200	190	15°

Model	G	M	H	L	Max. deflection
PJH-2A80	G1/4	2-M6	80	70	15°
PJH-2A100	G1/4	2-M6	100	90	15°
PJH-2A140	G1/4	2-M6	140	130	15°
PJH-2A200	G1/4	2-M6	200	190	15°
PJH-2B80	G3/8	2-M6	80	70	15°
PJH-2B100	G3/8	2-M6	100	90	15°
PJH-2B140	G3/8	2-M6	140	130	15°
PJH-2B200	G3/8	2-M6	200	190	15°