

Features

- ◇ Compact size, simple structure, suitable for vacuum handling system in narrow space.
- ◇ For suction cup circuit which does not cover the working surface, it can reduce vacuum leakage efficiently and ensure the stability of the system.



How to order

ZVT 60 - G1M

① ② ③

① Series	② Port diameter	③ Connection thread
ZVT	25 - Φ 0.25 100 - Φ 1.0	G1M - G1/8 Male thread
	40 - Φ 0.4 120 - Φ 1.2	G2M - G1/4 Male thread
	60 - Φ 0.6 150 - Φ 1.5	
	80 - Φ 0.8 200 - Φ 2.0	

Selection


Model/ Connection thread	G1M	G2M
ZVT25	●	-
ZVT40-120	●	●
ZVT150-200	-	●

◇ Note: "●"- default, in stock. "-"-unavailable.

Technical parameters

Model	Vacuum flow (NL/min) -30kPa	Vacuum flow (NL/min) -60kPa	Weight (g)	
			G1M	G2M
ZVT25	0.2	0.3	6	-
ZVT40	1	1.3	6	8
ZVT60	3.1	3.2	6	8
ZVT80	5	5.2	6	8
ZVT100	7.7	8.5	6	8
ZVT120	12.5	12.8	6	8
ZVT150	22.2	23.5	-	8
ZVT200	34	36.5	-	8

Dimensions (mm)

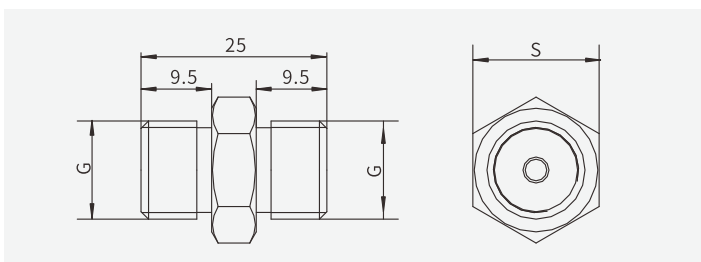

Model	G	S
ZVT-G1M	G1/8	14
ZVT-G2M	G1/4	17