

Features

- ◊ Small size, simple structure and light weight.
- ◊ It can be equipped with built-in or external vacuum pump.
- ◊ Suitable for handling light and small object.

Application

- ◊ 3C ◊ Sheet metal ◊ Sorting ◊ Package

How to order


TXN 15×76 - B5 WS - C

① ② ③ ④ ⑤

① Series	② Dimension	③ Adsorption surface type	④ Material of suction cup	⑤ Vacuum type
TXN	22×38	A - Conventional sponge type	-	Nil - Without vacuum pump
	22×76	AT - Mark free sponge type		
		CA - Conductive sponge type		
	60×120	A - Conventional sponge type	-	C - With built-in vacuum pump
	15×76	B5N - Ø5Double-row suction cup B7N - Ø7Double-row suction cup	Nil - Default, NBR. WS - White silicone	C - With built-in vacuum pump
	15×90	B3 - Ø3Single-row suction cup B5 - Ø5Single-row suction cup B7 - Ø7Single-row suction cup B3N - Ø3Double-row suction cup B5N - Ø5Double-row suction cup B7N - Ø7Double-row suction cup		
	27×90	B3D - Ø3 Four-row suction cup B5D - Ø5 Four-row suction cup B7D - Ø7 Four-row suction cup		

Features

◇ The product is applied to the handling and sorting of light and small workpieces.
It can be used to grasp the workpieces with porous structure and effectively grasp the workpieces with partial adsorption leakage.




Technical parameters

Air supply pressure(bar)	Max. vacuum level(- kPa) (Coverage area 100%)	Max. vacuum level(- kPa) (Coverage area 100%)	Max. vacuum flow(NL/min)	Air consumption (NL/min)	Diameter of suction cup
6.0	91	50	140	77	φ3 / φ5 / φ7

◇ Note: 1, The above products can be made into single row and double row, 9pcs suction cups in single row and 11pcs suction cups in double row.
2, The quantity and type of the above-mentioned suction cup can be customized. Please contact us if you have any special requirements.

Dimension(mm)

TXN15×90
Weight: 140g

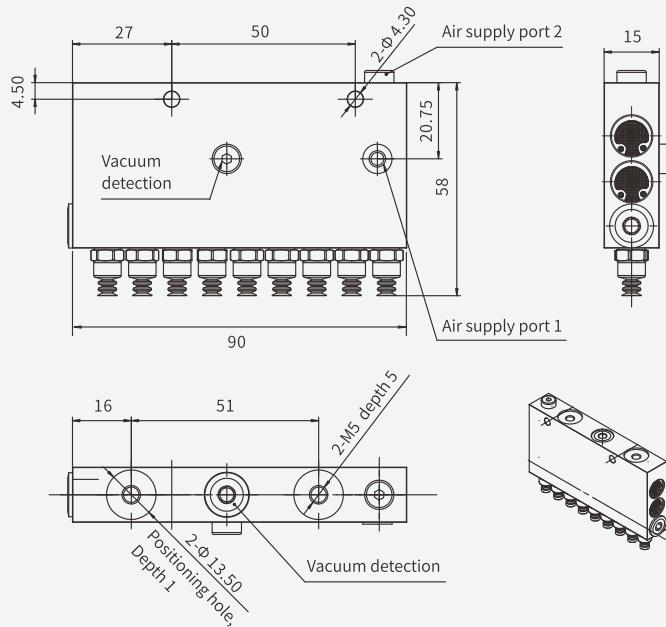

Spare parts

Suction cup	Model of suction cup	Specification (mm)
TXN suction cup	TXN-B3	φ3
TXN suction cup	TXN-B5	φ5
TXN suction cup	TXN-B7	φ7