
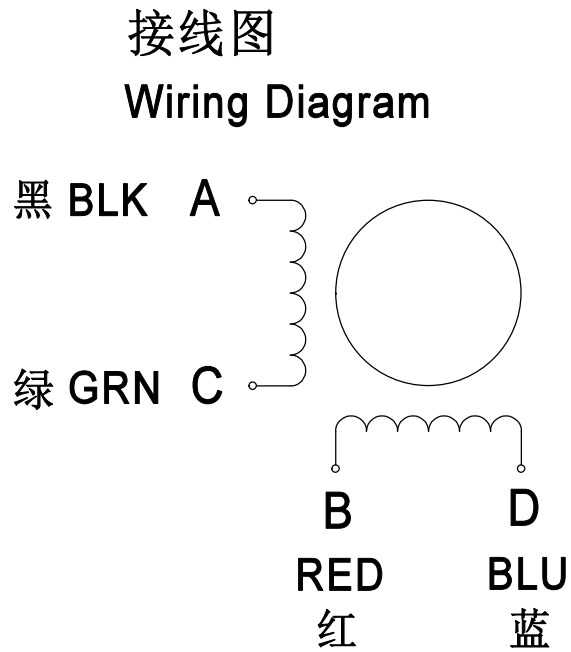
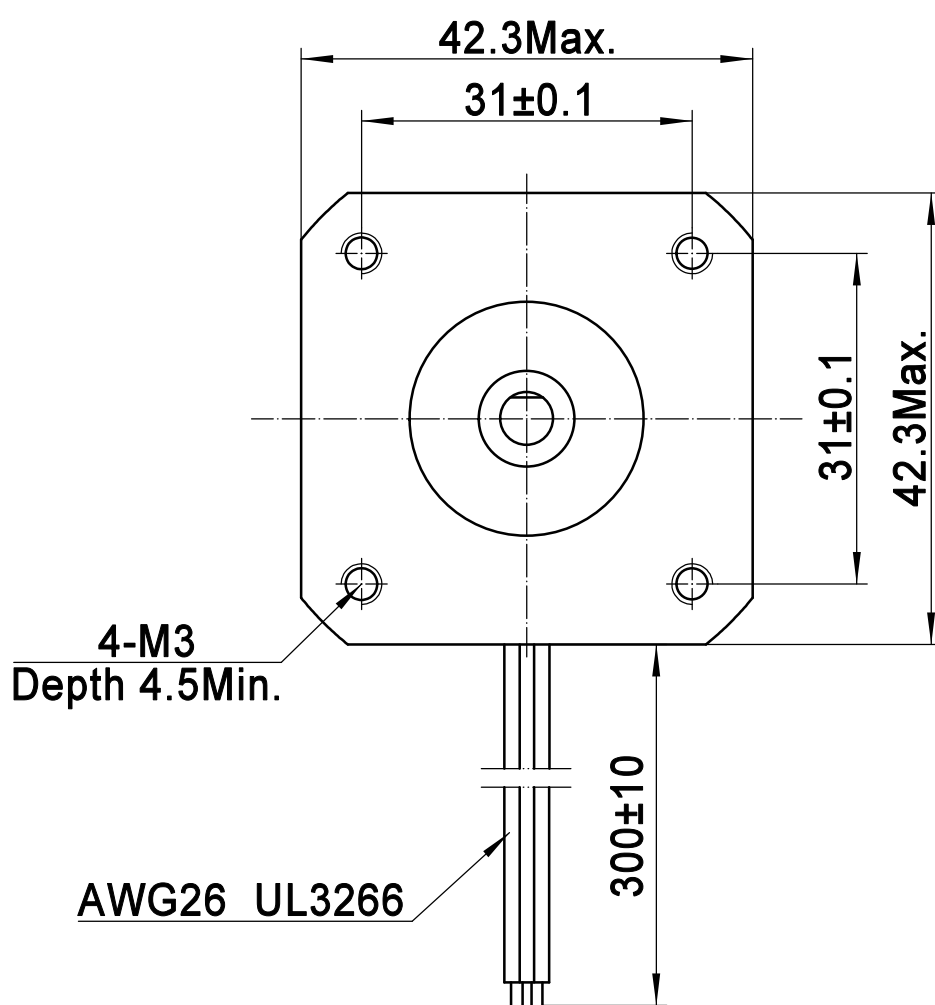
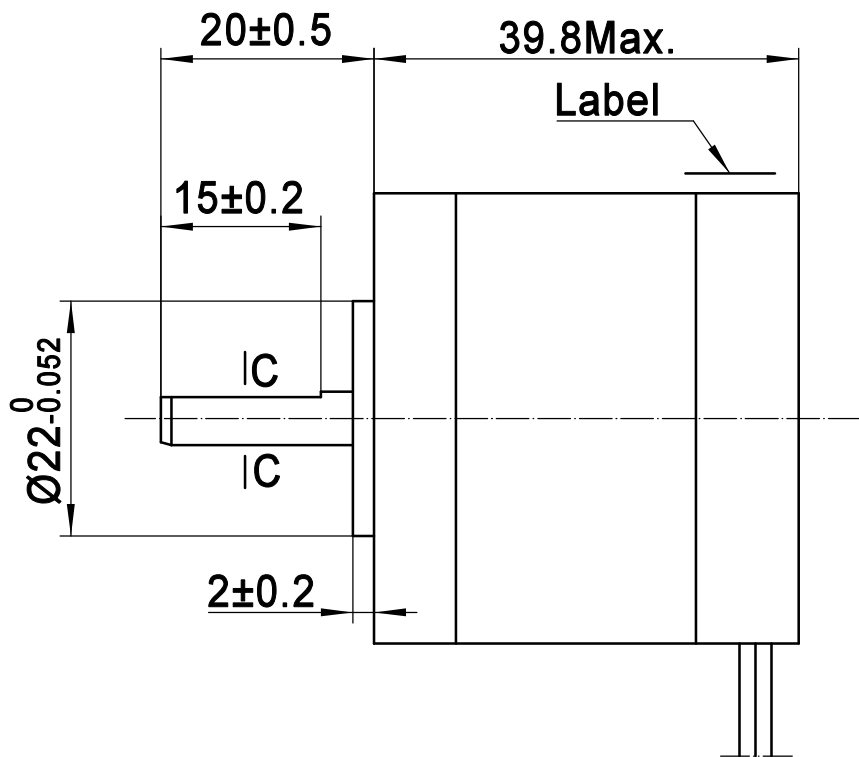


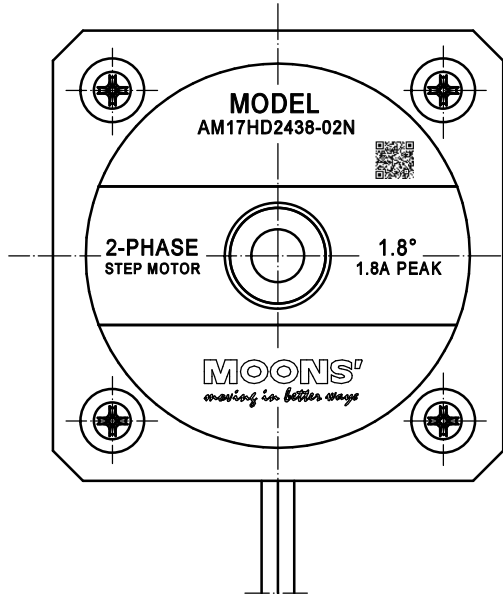

励磁顺序vs.旋转方向
Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

CW
↓

从安装面看为顺时针方向
Clockwise view from mouting side


标签 Label Detail

前8位XXXXXXXX--work order 加工单号
后4位XXXX--serial number 流水号

STEPPING MOTOR
XXXXXXXXXXXX

规格 Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	2.85V DC
4. 额定电流 Rated Current	1.5Amp
5. 保持力矩 Holding Torque	0.46N.m Typ.(Two phase on/rated current)
6. 相电阻 Phase Resistance	1.9ohm±10%(20°C)
7. 相电感 Phase Inductance	3.6mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	57g.cm^2
9. 电机重量 Motor Weight	280g
10. 绝缘等级 Insulation Class	B(130°C)

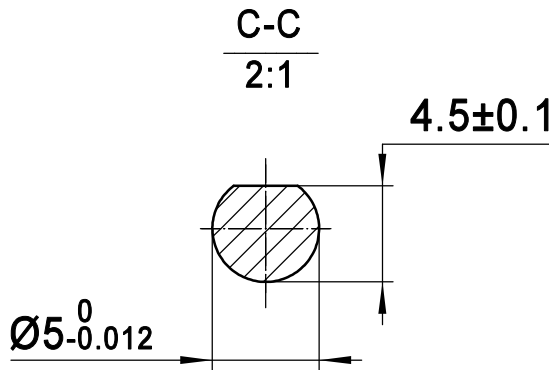

			Unit: mm 第一角画法 FIRST ANGLE METHOD 未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1 : m 未注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2 : K	批准 Approve			MOONS' Hybrid Stepping Motor			
				标准化 Standard			SHANGHAI AMP & MOONS' AUTOMATION CO.,LTD			
				工艺 Technology			This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.			
				审核 Check						
				设计 Design						
REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	Type: AM17HD2438-02N	Rev.A	SCALE 1:1	Sheet 1 of 1