

A

B

C

D

E





A

B

C

D

E

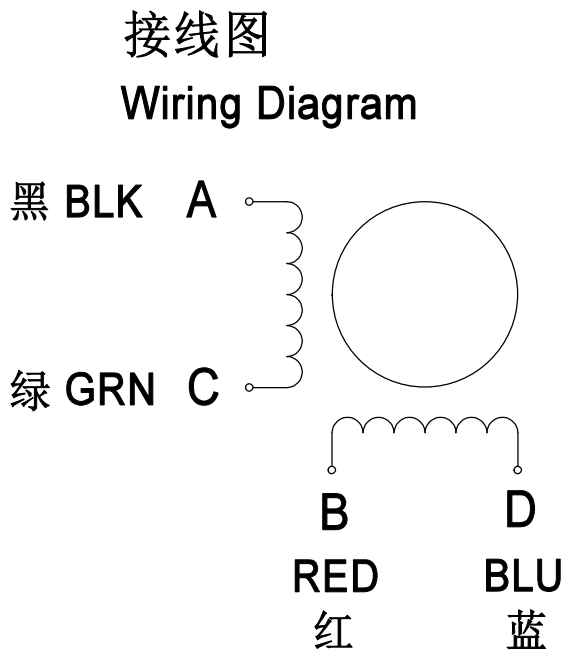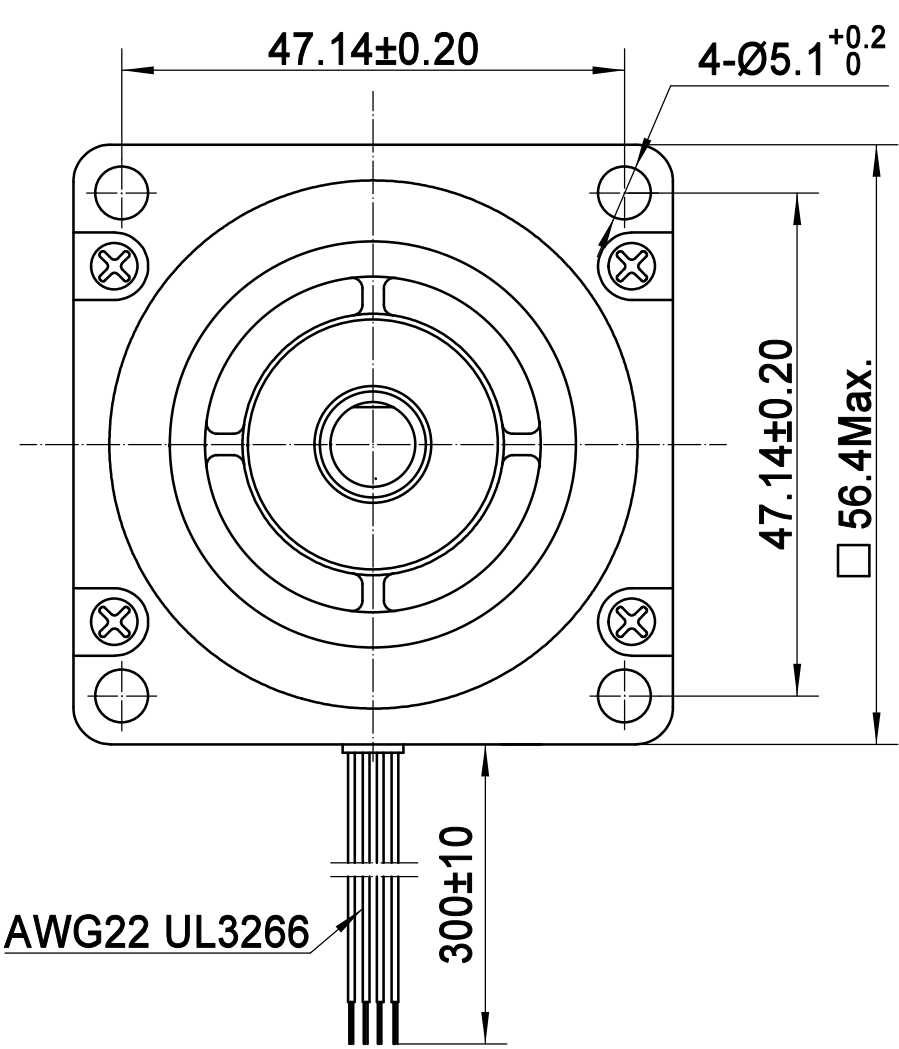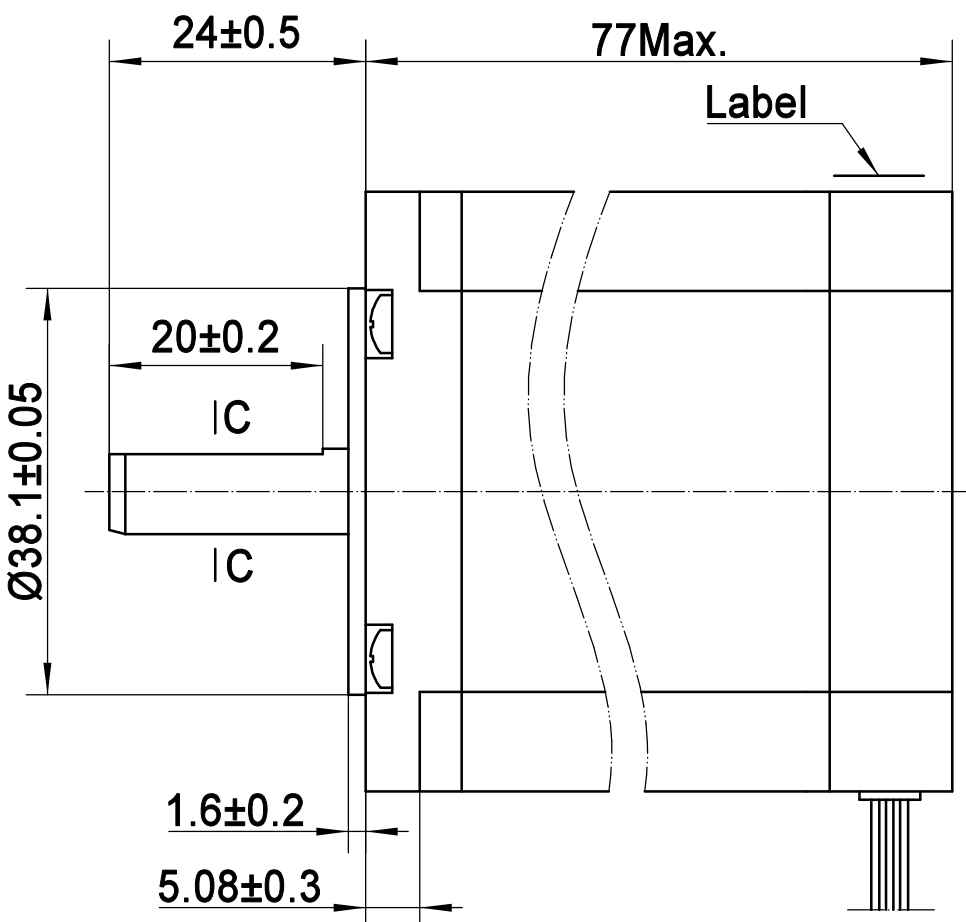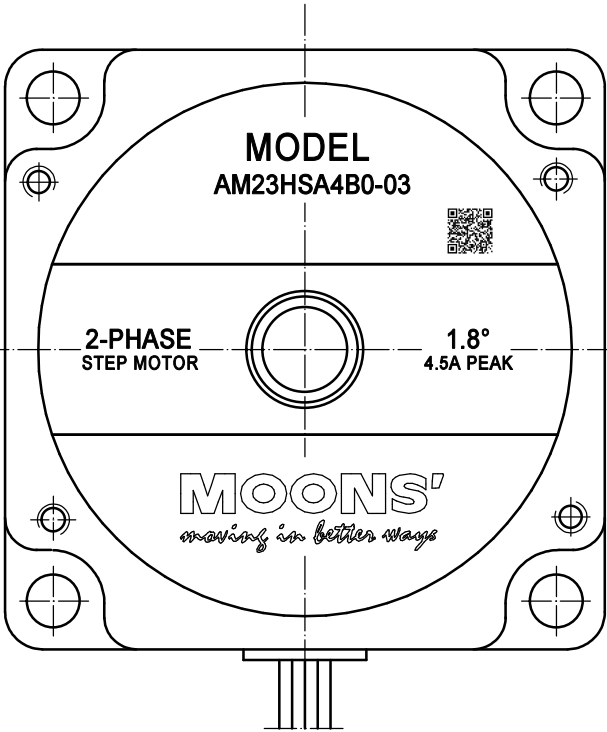

励磁顺序vs.旋转方向
Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↑ CW ↓
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	


从安装面看为顺时针方向
Clockwise view from mouting side

标签 Label Detail
前8位XXXXXXXX--work order 加工单号
后4位XXXX--serial number 流水号




规格 Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	2.78 V DC
4. 额定电流 Rated Current	3.7 Amp
5. 保持力矩 Holding Torque	2.44 N.m Typ.(Two phase on/rated current)
6. 相电阻 Phase Resistance	0.75±0.1ohm(20°C)
7. 相电感 Phase Inductance	3 mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	365 g.cm^2
9. 电机重量 Motor Weight	840 g
10. 绝缘等级 Insulation Class	B(130°C)

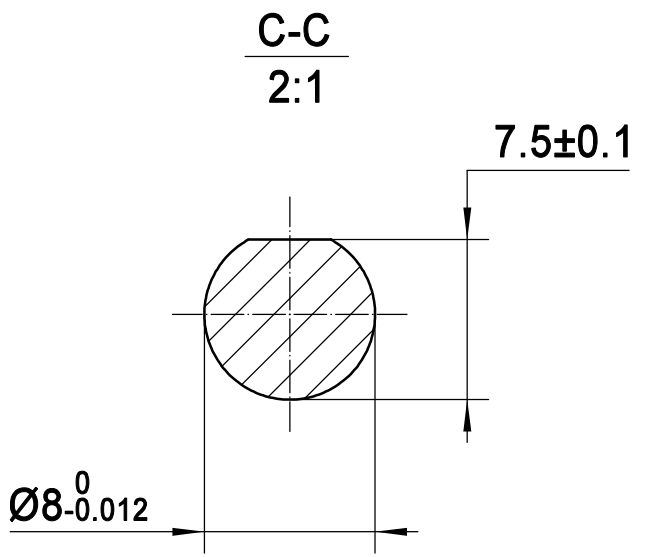

F

F

			Unit: mm 第一角画法 FIRST ANGLE METHOD  未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1 : m 未注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2 : K	批准 Approve			MOONS' SHANGHAI AMP & MOONS' AUTOMATION CO.,LTD		Hybrid Stepping Motor This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.		
				标准化 Standard							
				工艺 Technology							
				审核 Check							
				设计 Design							
REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	Type: AM23HSA4B0-03	Rev.A	SCALE 1:1	Sheet 1 of 1	