

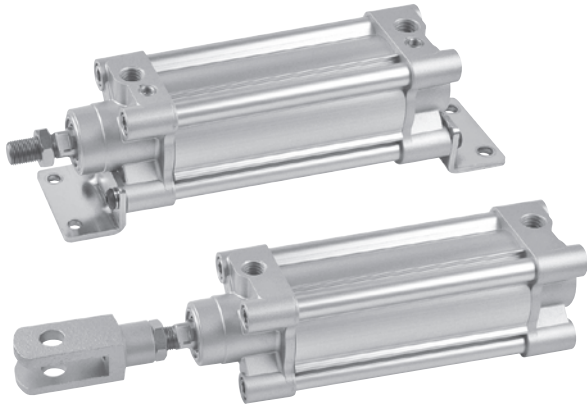



Table for standard stroke

Tube I.D.	Stroke (mm)	Max. stroke (mm)
ø32, 40	50, 75, 100, 125, 150, 175,	1800
ø50, 63	200, 250, 300, 350, 400,	2000
ø80, 100	450, 500, 600, 700, 800	2500

* Please contact us if the stroke is out of specification.

Order example

MCQI3 — 11 — 63 — 100 M — S — T

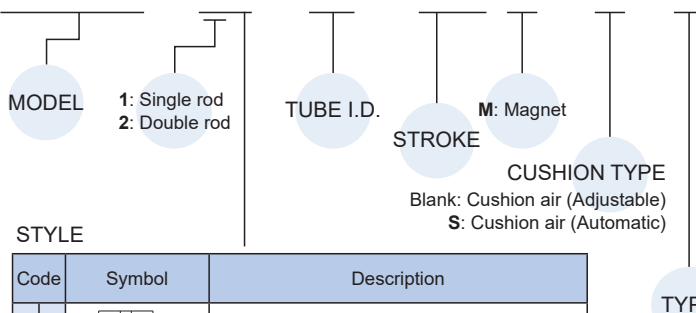

STYLE

Code	Symbol	Description
1 1		Double acting / Male thread
2 1		Double rod / Double acting / Male thread

TYPE

T: With magnet, TA/TB is assembled

* Tube, piston rod and tie rod are extended, and an extra piston is added.

Features

■ Non lubrication

Special housing and bushing enables self lubrication of piston rod.

■ High quality long service life


Hard anodised aluminium cylinder tubes offer a high resistance to corrosion and low internal friction.

■ Automatic air cushioning

Pneumatic cushioning at both ends without adjusting.

■ Low noise level

Add cushion pad to reduce impact sound and vibration.

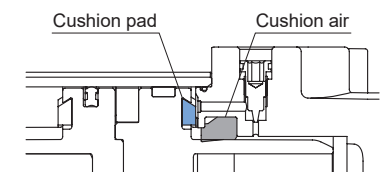

■ ISO 15552 standard specification

Conforms to ISO 15552 specification enabling worldwide interchangeability.

■ Easy to insert reed switch

With four grooves on the tube, proximity and reed sensors can be easily inserted into any position.

Specification



Model	MCQI3
Tube I.D. (mm)	32, 40, 50, 63, 80, 100
Medium	Air
Operating pressure range	0.05~1 MPa
Proof pressure	1.5 MPa
Ambient temperature	-5~+60°C (No freezing)
Available speed range	50~500 mm/sec
Sensor switch	RCI (Please refer to page 8-14)

* Order example for special specification, refer to page 0-7.

* Rc or NPT thread are also available, please contact us.

Accessories & Connector

Code	Accessories						Rod nut
	LB (Purchase 2 pcs)	CA	CB	CDB (Purchase CB+PIN)	FAC	FBC	NUT
Mounting Tube I.D.							
ø32	LB-Q2-32	CA-Q2-32	CB-Q2-32	CDB-Q2-32	FAC-Q2-32	FBC-Q2-32	NUT-M10x1.25x5Hx17B
ø40	LB-Q2-40	CA-Q2-40	CB-Q2-40	CDB-Q2-40	FAC-Q2-40	FBC-Q2-40	NUT-M12x1.25x6Hx19B
ø50	LB-Q2-50	CA-Q2-50	CB-Q2-50	CDB-Q2-50	FAC-Q2-50	FBC-Q2-50	NUT-M16x1.5x8Hx24B
ø63	LB-Q2-63	CA-Q2-63	CB-Q2-63	CDB-Q2-63	FAC-Q2-63	FBC-Q2-63	
ø80	LB-Q2-80	CA-Q2-80	CB-Q2-80	CDB-Q2-80	FAC-Q2-80	FBC-Q2-80	NUT-M20x1.5x10Hx30B
ø100	LB-Q2-100	CA-Q2-100	CB-Q2-100	CDB-Q2-100	FAC-Q2-100	FBC-Q2-100	

	Accessories ⚠ Factory assembled and shipped (self-assembled is not recommended)			Connector		
Code	TA	TB	TC	Y	I	YS (Y+Floating pin)
Mounting Tube I.D.						
ø32	TC-Q3-32			Y-Q2-32	I-Q2-32	YS-Q2-32
ø40	TC-Q3-40			Y-Q2-40	I-Q2-40	YS-Q2-40
ø50	TC-Q3-50			Y-Q2-50	I-Q2-50	YS-Q2-50
ø63	TC-Q3-63					
ø80	TC-Q3-80			Y-Q2-80	I-Q2-80	YS-Q2-80
ø100	TC-Q3-100					

Pin

Applicable	YS connector	Y&I connector	CA&CB accessories
Code	PIN-S	PIN-Y-P (with split pin)	PIN-CB-P (with split pin)
Fig Tube I.D.			
ø32	PIN-Q2-32-S	PIN-Q2-32-2-P	PIN-Q2-32-1-P
ø40	PIN-Q2-40-S	PIN-Q2-40-2-P	PIN-Q2-40-1-P
ø50	PIN-Q2-50-S	PIN-Q2-50-2-P	PIN-Q2-50-1-P
ø63			PIN-Q2-63-1-P
ø80	PIN-Q2-80-S	PIN-Q2-80-2-P	PIN-Q2-80-1-P
ø100			PIN-Q2-100-1-P

Order example of self-assembled


The tube I.D. ø40 of LB accessories, Y connector and pin.

No.	Order number	Qty
1	LB-Q2-40	2
2	Y-Q2-40	1
3	PIN-Q2-40-2-P	1

* To order accessories/ connectors/ pin separately, please place orders separately according to the order codes in the above table.

Order example of factory assembled

△ Cylinders and accessories are distinguished by the symbol " + ".

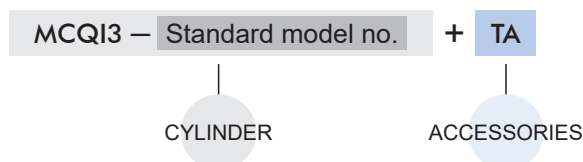

MCQI3-11 Inside structure & Parts list


ISO 15552 **STANDARD PROFILE CYLINDER**




Single rod 11 type

Cushion air (Adjustable)


ø32, ø40

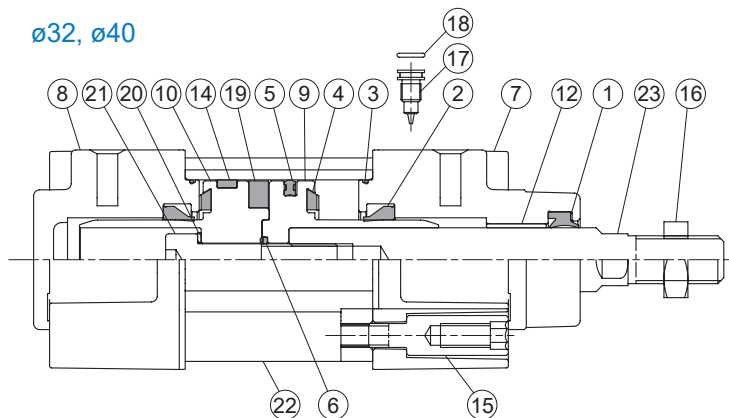


ø50

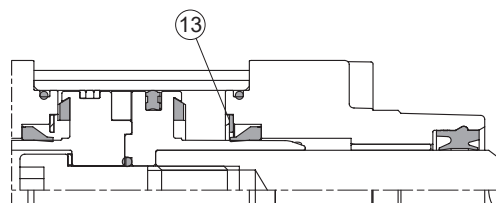

ø63

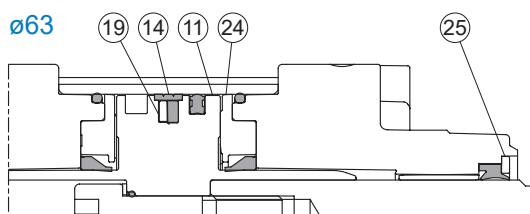

ø80, ø100



Material

No.	Part name	Material	Q'ty	Component parts (inclusion)	Repair kits (inclusion)	Note
1	Rod packing	NBR	1	●	●	Repair kits ø50 not included
2	Cushion packing	NBR	2	●	●	
3	O-ring	NBR	2	●	●	
4	Cushion pad	NBR	2	●	●	
5	Piston packing	NBR	1	●	●	
6	O-ring	NBR	1	●	●	
7	Rod cover	Aluminum alloy	1	●		
8	Head cover	Aluminum alloy	1	●		
9	Piston #1	Aluminum alloy	1	●		
10	Piston #2	Aluminum alloy	1	●		
11	Piston	Aluminum alloy	1	●		Only for ø63
12	Bush	Bearing alloy	1	●		
13	Washer	Carbon steel	2	●		Only for ø50
14	Wear ring	Resin	1	●		
15	Screw	Carbon steel	8	●		
16	Piston rod nut	Carbon steel	1	●		
17	Needle valve	Copper alloy	2	●		
18	O-ring	NBR	2	●		
19	Magnet ring	Magnet material	1	◎		◎ Option
20	Washer	Carbon steel	1	●		
21	Hex bolt	Carbon steel	1	●		
22	Cylinder tube	Aluminum alloy	1			
23	Piston rod *1	Carbon steel	1			
24	Cushion seal holder	Aluminum alloy	2	●		Only for ø63
25	Washer	Carbon steel	1	●		Only for ø63

*1. When customized material is bearing steel, only two-side across flat (wrench flat) is available.

MCQI3-11-S Inside structure & Parts list


ISO 15552 **STANDARD PROFILE CYLINDER**




Single rod 11 type

Cushion air (Automatic)


ø32, ø40

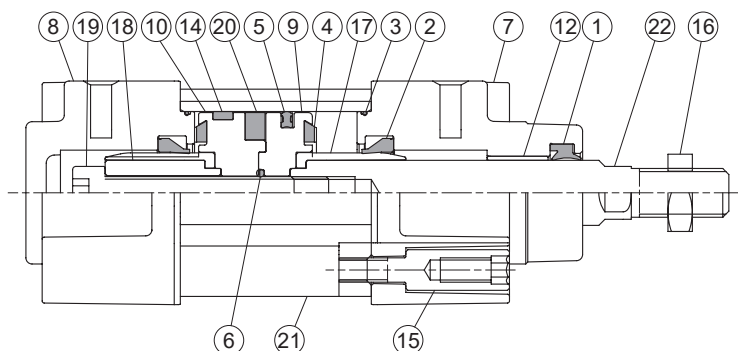


ø50

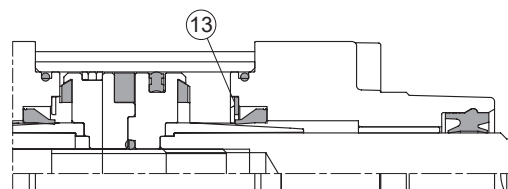

ø63

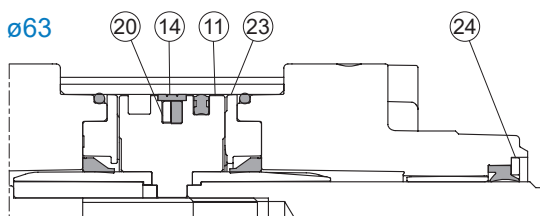

ø80, ø100

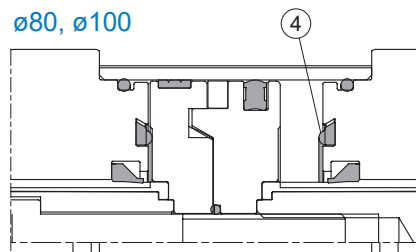

Material

No.	Part name	Material	Q'ty	Component parts (inclusion)	Repair kits (inclusion)	Note
1	Rod packing	NBR	1	●	●	Repair kits ø50 not included
2	Cushion packing	NBR	2	●	●	
3	O-ring	NBR	2	●	●	
4	Cushion pad	NBR	2	●	●	
5	Piston packing	NBR	1	●	●	
6	O-ring	NBR	1	●	●	
7	Rod cover	Aluminum alloy	1	●		
8	Head cover	Aluminum alloy	1	●		
9	Piston #1	Aluminum alloy	1	●		
10	Piston #2	Aluminum alloy	1	●		
11	Piston	Aluminum alloy	1	●		Only for ø63
12	Bush	Bearing alloy	1	●		
13	Washer	Carbon steel	2	●		Only for ø50
14	Wear ring	Resin	1	●		
15	Screw	Carbon steel	8	●		
16	Piston rod nut	Carbon steel	1	●		
17	Shock absorber axis	Resin	2	●		
18	Piston nut	Aluminum alloy	1	●		
19	Hex bolt	Carbon steel	1	●		
20	Magnet ring	Magnet material	1	◎		◎ Option
21	Cylinder tube	Aluminum alloy	1			
22	Piston rod *1	Carbon steel	1			
23	Cushion seal holder	Aluminum alloy	2	●		Only for ø63
24	Washer	Carbon steel	1	●		Only for ø63

*1. When customized material is bearing steel, only two-side across flat (wrench flat) is available.

MCQI3-21/27 Inside structure & Parts list


ISO 15552 **STANDARD PROFILE CYLINDER**




Double rod 21 / 27 type

Cushion air (Adjustable)


ø32, ø40

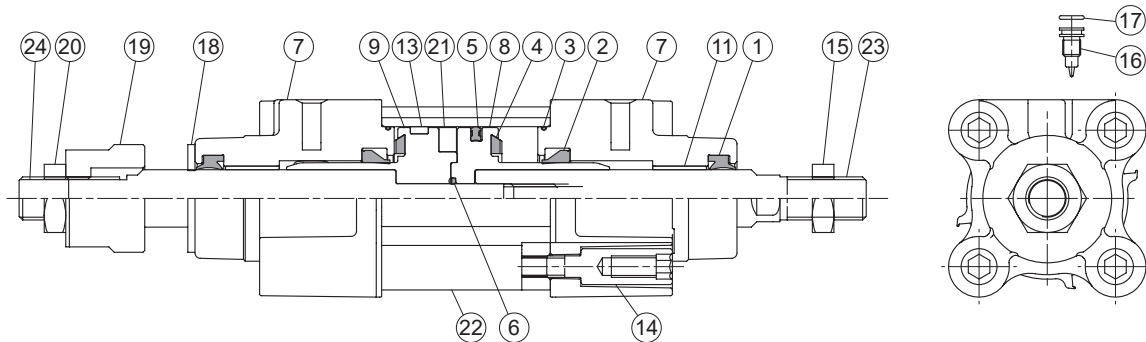


ø50

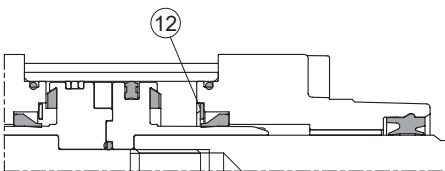

ø63

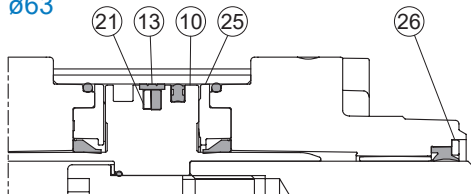

ø80, ø100



Material

No.	Part name	Material	Q'y	Component parts (inclusion)		Repair kits (inclusion)	Note
				21 type	27 type		
1	Rod packing	NBR	2	●	●	●	Repair kits ø50 not included
2	Cushion packing	NBR	2	●	●	●	
3	O-ring	NBR	2	●	●	●	
4	Cushion pad	NBR	2	●	●	●	
5	Piston packing	NBR	1	●	●	●	
6	O-ring	NBR	1	●	●	●	
7	Rod cover	Aluminum alloy	2	●	●		
8	Piston #1	Aluminum alloy	1	●	●		
9	Piston #2	Aluminum alloy	1	●	●		
10	Piston	Aluminum alloy	1	●	●		Only for ø63
11	Bush	Bearing alloy	2	●	●		
12	Washer	Carbon steel	2	●	●		Only for ø50
13	Wear ring	Resin	1	●	●		
14	Screw	Carbon steel	8	●	●		
15	Piston rod nut	Carbon steel	1	●	●		
16	Needle valve	Copper alloy	2	●	●		
17	O-ring	NBR	2	●	●		
18	Gasket	PU	1		●		
19	Adjustable nut	Carbon steel	1		●		
20	Hex nut	Carbon steel	1		●		
21	Magnet ring	Magnet material	1	◎	◎		◎ Option
22	Cylinder tube	Aluminum alloy	1				
23	Piston rod #1 *1	Carbon steel	1				
24	Piston rod #2 *1	Carbon steel	1				
25	Cushion seal holder	Aluminum alloy	1	●	●		Only for ø63
26	Washer	Carbon steel	1	●	●		Only for ø63

*1. When customized material is bearing steel, only two-side across flat (wrench flat) is available.

MCQI3-21/27-S Inside structure & Parts list

ISO 15552 **STANDARD PROFILE CYLINDER**





Double rod 21 / 27 type


Cushion air (Automatic)

ø32, ø40


ø50

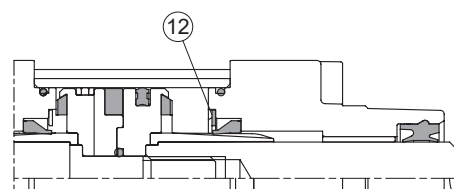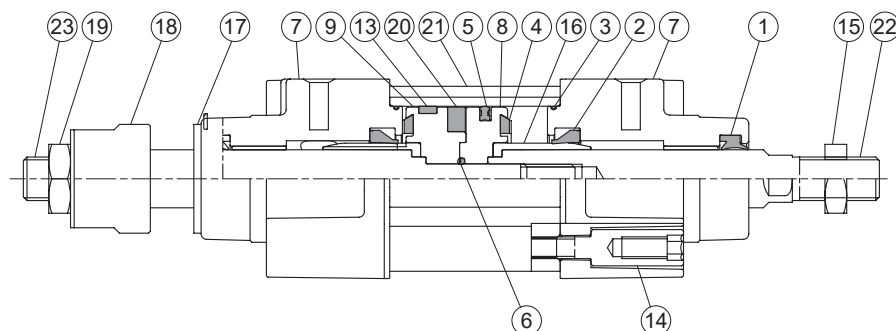

ø63

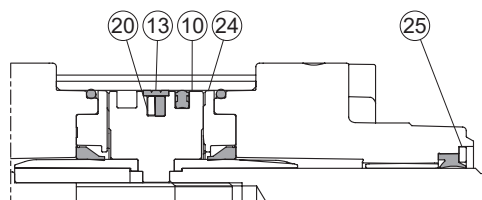

ø80, ø100

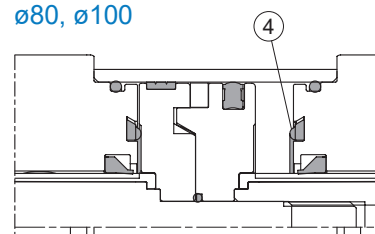


Material

No.	Part name	Material	Q'y	Component parts (inclusion)		Repair kits (inclusion)	Note
				21 type	27 type		
1	Rod packing	NBR	2	●	●	●	Repair kits ø50 not included
2	Cushion packing	NBR	2	●	●	●	
3	O-ring	NBR	2	●	●	●	
4	Cushion pad	NBR	2	●	●	●	
5	Piston packing	NBR	1	●	●	●	
6	O-ring	NBR	1	●	●	●	
7	Rod cover	Aluminum alloy	2	●	●		
8	Piston #1	Aluminum alloy	1	●	●		
9	Piston #2	Aluminum alloy	1	●	●		
10	Piston	Aluminum alloy	1	●	●		Only for ø63
11	Bush	Bearing alloy	2	●	●		
12	Washer	Carbon steel	2	●	●		Only for ø50
13	Wear ring	Resin	1	●	●		
14	Screw	Carbon steel	8	●	●		
15	Piston rod nut	Carbon steel	1	●	●		
16	Shock absorber axis	Resin	2	●	●		
17	Gasket	PU	1		●		
18	Adjustable nut	Carbon steel	1		●		
19	Hex nut	Carbon steel	1		●		
20	Magnet ring	Magnet material	1	◎	◎		◎ Option
21	Cylinder tube	Aluminum alloy	1				
22	Piston rod #1 *1	Carbon steel	1				
23	Piston rod #2 *1	Carbon steel	1				
24	Cushion seal holder	Aluminum alloy	1	●	●		Only for ø63
25	Washer	Carbon steel	1	●	●		Only for ø63

*1. When customized material is bearing steel, only two-side across flat (wrench flat) is available.

Order example of component parts


CP — MCQI3 — 2 — 63 M S

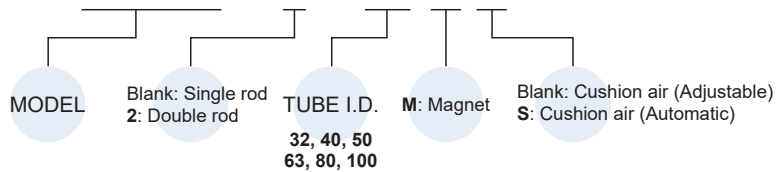

* Order example for Rc or NPT thread please consult us.

Order example of repair kits

PS — MCQI3 — 2 — 63 S — XB6

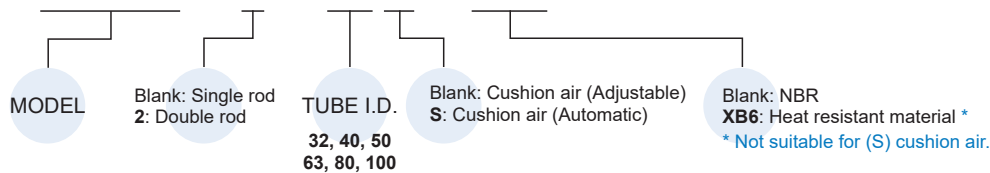

Cylinder & accessories weight

Cylinder weight


Unit: kg

Model	Basic weight MCQI3-11	Basic weight (magnet) MCQI3-11	Basic weight MCQI3-11-S	Basic weight (magnet) MCQI3-11-S	Stroke 25 mm MCQI3-11
Tube I.D.					
ø32	0.534	0.540	0.531	0.537	0.062
ø40	0.789	0.801	0.783	0.795	0.088
ø50	1.300	1.317	1.293	1.310	0.120
ø63	1.785	1.805	1.774	1.794	0.129
ø80	2.653	2.680	2.638	2.665	0.185
ø100	3.949	3.984	3.885	3.920	0.236

Accessories weight

Unit: kg

Model	LB	CA	CB	CDB	FAC/FBC	TA/TB/TC	Y	I	Pin		YS
									Y / I	CA / CB	
Tube I.D.											
ø32	0.163	0.213	0.185	0.170	0.235	0.208	0.070	0.080	0.02	0.040	0.018
ø40	0.211	0.253	0.211	0.230	0.265	0.282	0.115	0.141	0.03	0.065	0.031
ø50	0.315	0.390	0.352	0.410	0.460	0.377	0.272	0.334	0.08	0.072	0.070
ø63	0.395	0.670	0.544	0.550	0.684	0.675	0.272	0.334	0.08	0.145	0.070
ø80	0.816	1.076	0.982	0.870	1.508	1.025	0.551	0.553	0.16	0.179	0.150
ø100	1.014	1.587	1.493	1.400	1.975	1.680	0.551	0.553	0.16	0.330	0.150


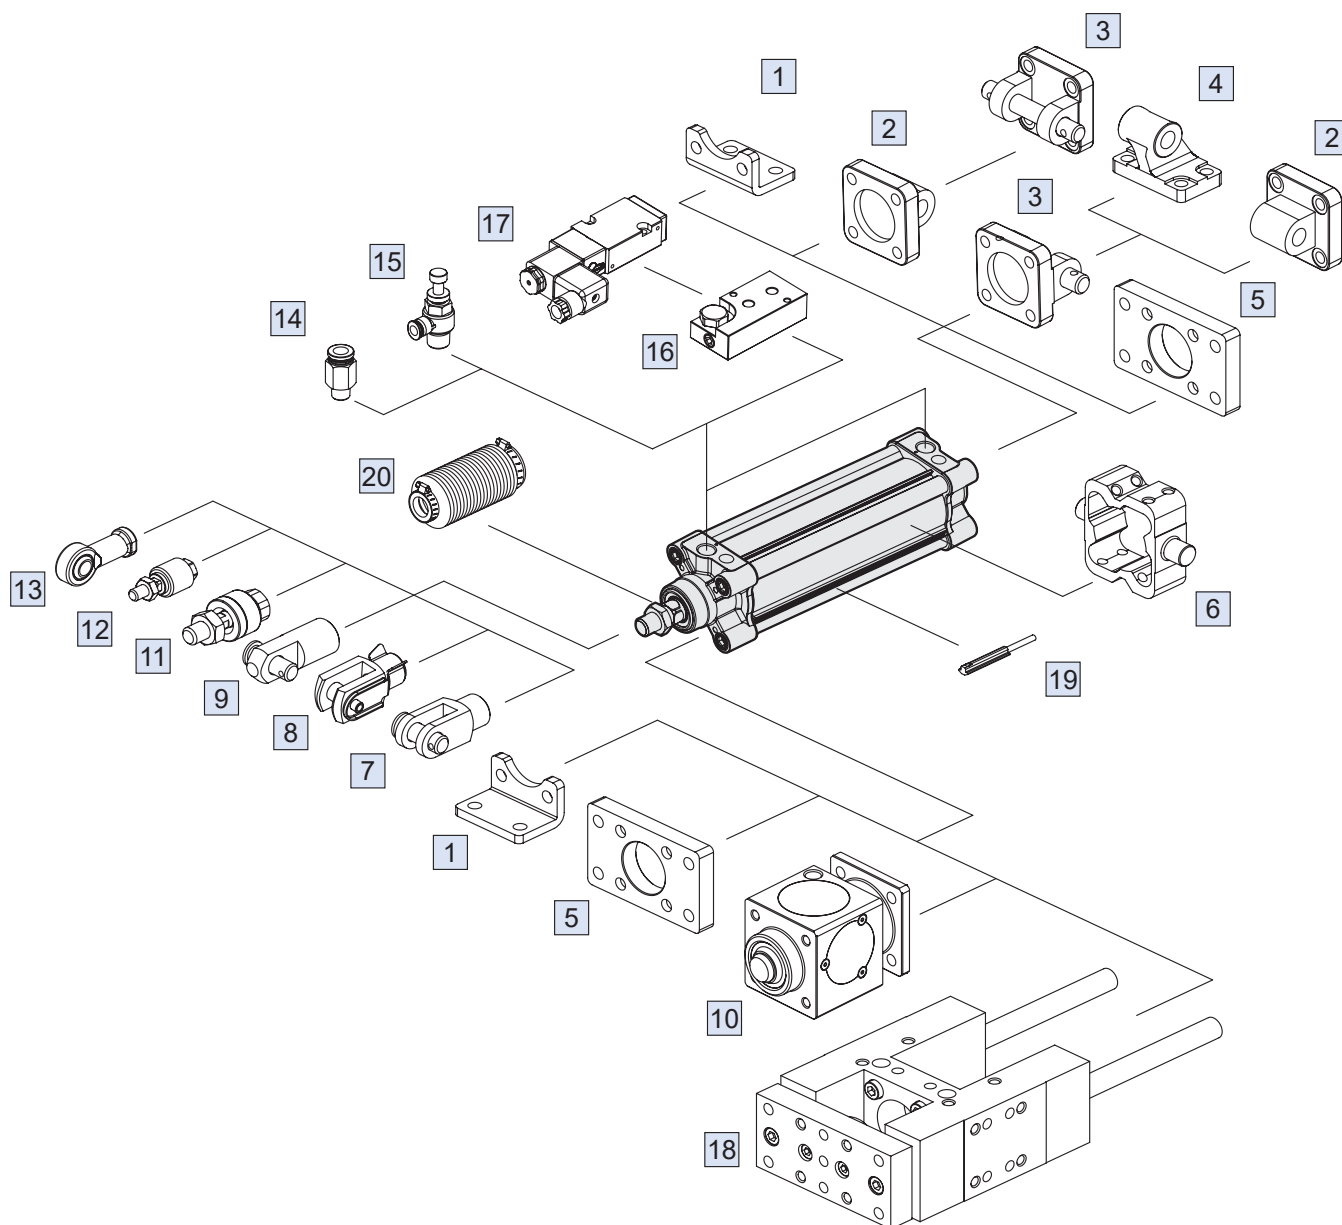


No.	Accessories	Material	Page
1	Mounting accessories LB	Carbon steel	1-74
2	Mounting accessories CA	Cast iron	1-76
3	Mounting accessories CB+PIN	Cast iron / *1	1-76, 46
4	Mounting accessories CDB	Cast iron	1-77
5	Mounting accessories FAC/FBC	Carbon steel	1-75
6	Mounting accessories TA/TB/TC	Cast iron	1-77, 78
7	Accessories Y+PIN	Cast iron / *1	1-46
8	Accessories YS (Y+Floating pin)	Carbon steel	1-46
9	Accessories I+PIN	Carbon steel	1-46
10	Locking unit MCBQI3	Aluminum alloy+*2	1-88


No.	Accessories	Material	Page
11	Floating joint MFC	Carbon steel	8-2
12	Floating joint MFCS	Carbon steel	8-5
13	Female rod ends PHS	Carbon steel	8-7
14	Fitting PC (PISCO)	—	8-3 (Vol.1)
15	Speed controller JSC (PISCO)	—	8-15 (Vol.1)
16	Cylinder link seats MVSN-300-C *3	Aluminum alloy	1-69 (Vol.1)
17	Solenoid valve MVSN-220 / 300 *3	—	1-65, 67 (Vol.1)
18	Twin-guide cylinders MGTB/TU/TX	—	4-39
19	Sensor switch RCI	—	8-14
20	Protective bellows kit	NBR	—

*1. PIN material is carbon steel. *2. Bronze alloy.
 *3. Only for tube I.D. ø40, ø50.


11

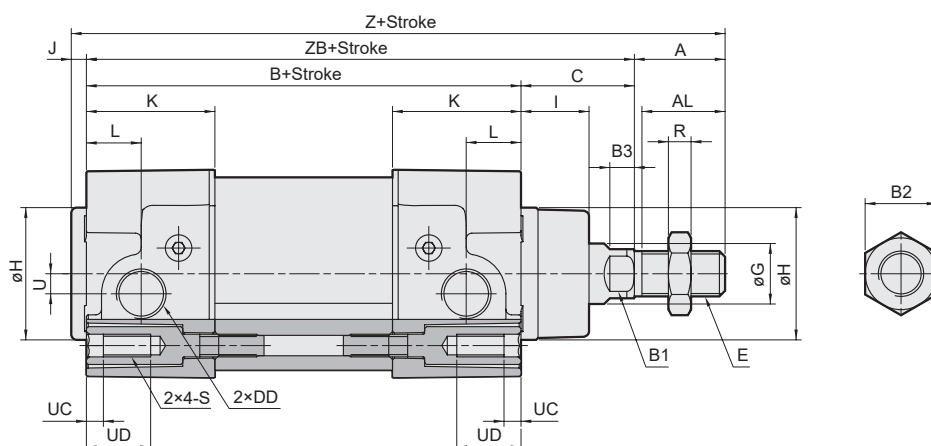

21

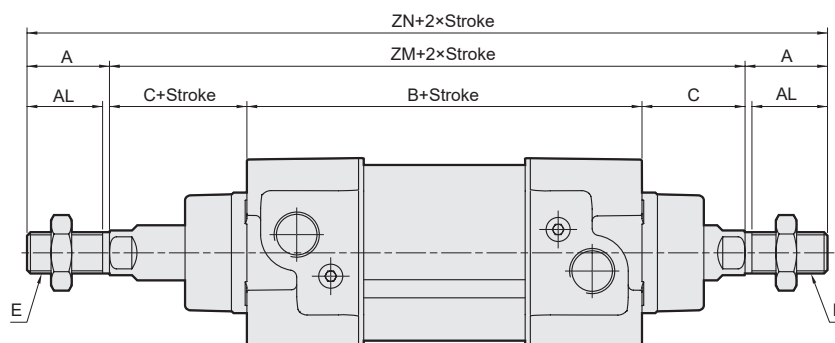


27

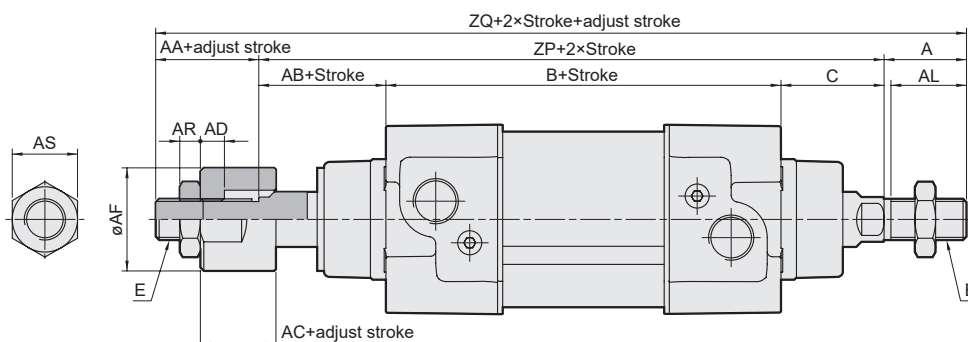

Code Tube I.D.	A	AA	AB	AC	AD	AE	AF	AL	AR	AS	B	B1	B2	B3	C	DD	E	G	H	I	J	K	L	O
32	22	16	26	12	7	M10×1.25	20	20	5	17	94	10	17	4	26	G1/8	M10×1.25	12	30	15	4	30.5	20	32.5
40	24	20	27	12	7	M12×1.25	30	22	6	19	105	13	19	6.5	30	G1/4	M12×1.25	16	35	18	4	34	14.5	38
50	32	18	34	15	10	M16×1.5	40	30	8	24	106	17	24	6	37	G1/4	M16×1.5	20	40	28	4	31	16	46.5
63	32	20	32	15	10	M16×1.5	40	30	8	24	121	17	24	8	37	G3/8	M16×1.5	20	45	26	4	33	16	56.5
80	40	32	41	20	14	M22×1.5	50	38	13	32	128	22	30	10	46	G3/8	M20×1.5	25	45	32.5	4	35.5	20.5	72
100	40	30	46	20	14	M22×1.5	50	38	13	32	138	22	30	10	51	G1/2	M20×1.5	25	55	37.5	4	37	19	89


Code Tube I.D.	R	S	U	UC	UD	X	Z	ZB	ZM	ZN	ZP	ZQ
32	5	M6×1.0	4.5	4.5	16	47	146	120	146	190	146	184
40	6	M6×1.0	5.3	4.5	16	55	163	135	165	213	162	206
50	8	M8×1.25	8.5	4.5	16	65	179	143	180	244	177	227
63	8	M8×1.25	8	4.5	16	78	194	158	195	259	190	242
80	10	M10×1.5	9	4.5	18	95	218	174	220	300	215	287
100	10	M10×1.5	13	4.5	18	115	233	189	240	320	235	305

■ Installation of sensor switch

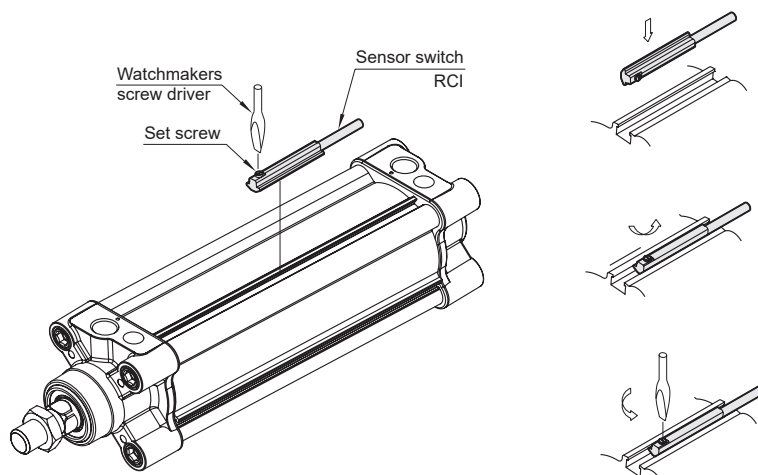


■ Mounting accessories

LB

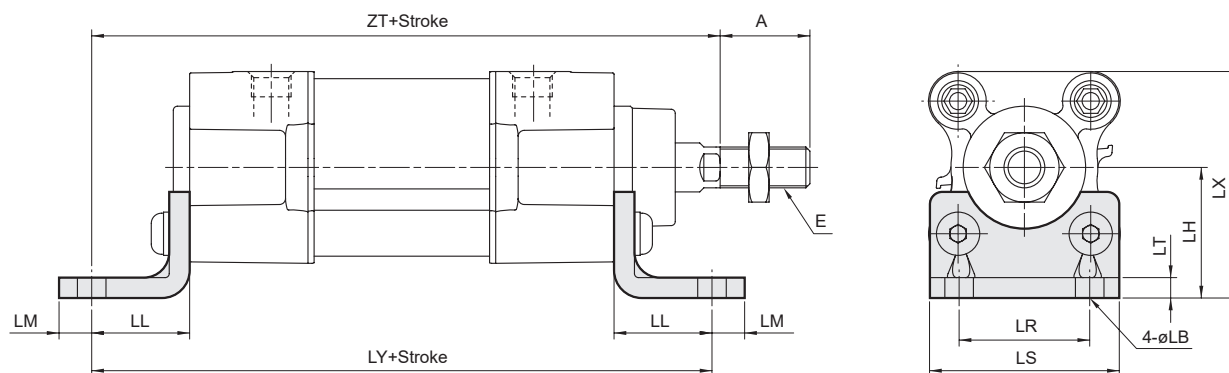


Code Tube I.D.	A	E	LB	LH	LL	LM	LR	LS	LT	LX	LY	ZT
32	22	M10×1.25	7	32	24	8	32	47	5	55.5	142	144
40	24	M12×1.25	9	36	28	10	36	53	5	63.2	161	163
50	32	M16×1.5	9	45	32	10	45	65	5	77.5	170	175
63	32	M16×1.5	9	50	32	10	50	75	5	89.0	185	190
80	40	M20×1.5	12	63	41	13	63	95	6	110.5	210	215
100	40	M20×1.5	14	71	41	13	75	115	6	128.5	220	230

FAC


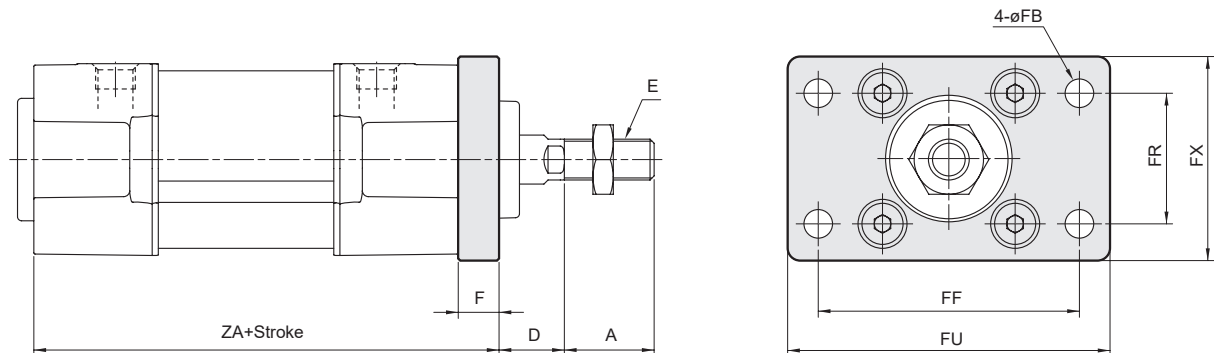


FBC


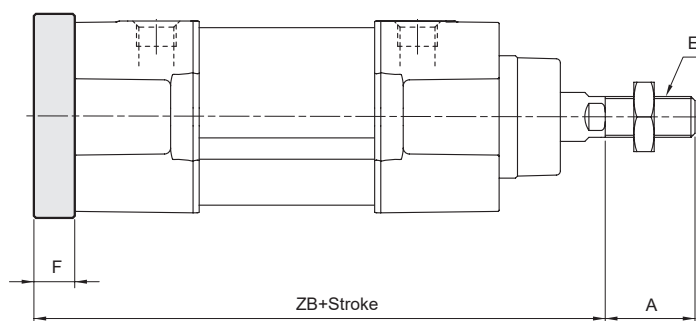


Code Tube I.D.	A	D	E	F	FB	FF	FR	FU	FX	ZA	ZB
32	22	16	M10×1.25	10	7	64	32	79	50	104	130
40	24	20	M12×1.25	10	9	72	36	90	52	115	145
50	32	25	M16×1.5	12	9	90	45	110	65	118	155
63	32	25	M16×1.5	12	9	100	50	125	76	133	170
80	40	30	M20×1.5	16	12	126	63	154	94	144	190
100	40	35	M20×1.5	16	14	150	75	180	112	154	205

CA

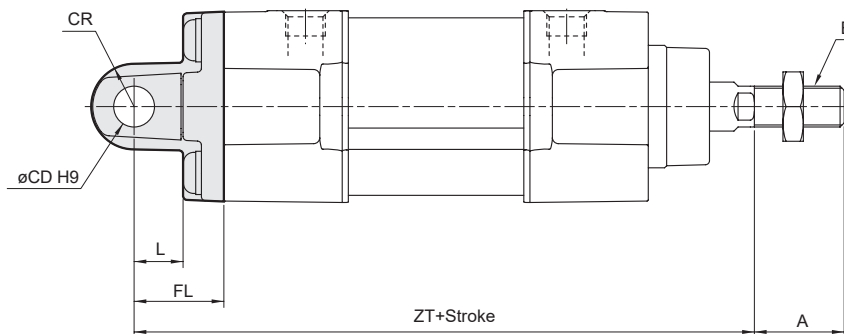



CB

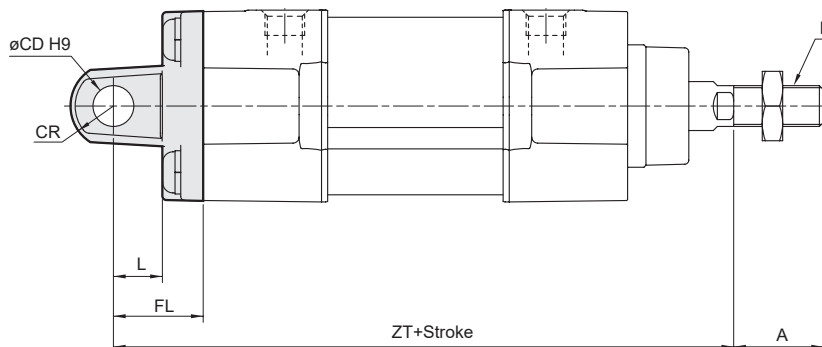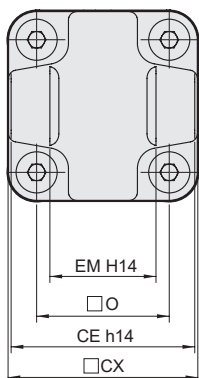


CDB

CB+Pin (Extra purchase)

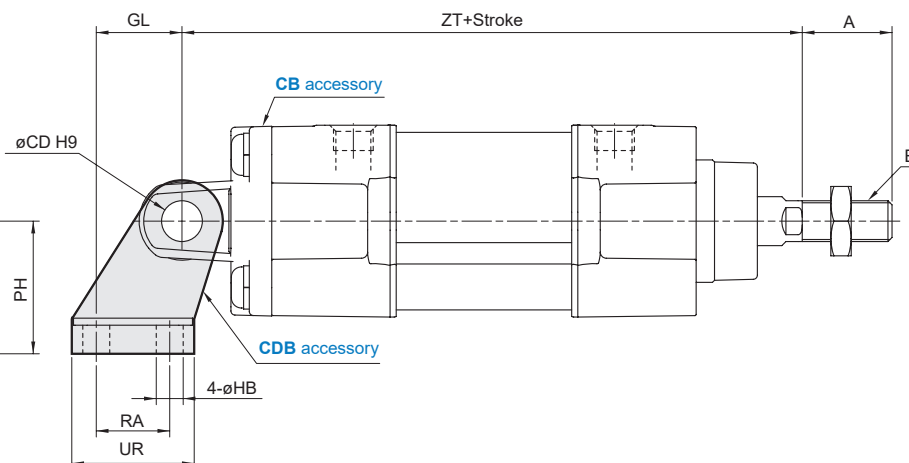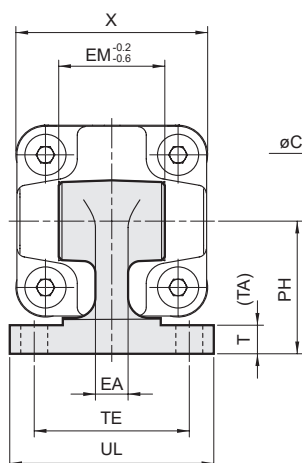


Code Tube I.D.	A	CD	CE	CR	CX	E	EA	EM	FL	GL	HB	L	O	PH	RA	T	TA	TE	UL	UR	X	ZT
32	22	10	45	R10.5	46.5	M10×1.25	8	26	22	21	6.6	12	32.5	32	18	6.5	1.5	38	50	30	47	142
40	24	12	52	R12	54	M12×1.25	10	28	25	24	6.6	15	38	36	22	8.5	1.5	41	53	34	55	160
50	32	12	60	R13	64	M16×1.5	10	32	27	33	9	15	46.5	45	30	10.5	1.5	50	65	45	65	170
63	32	16	70	R17	75	M16×1.5	12	40	32	37	9	20	56.5	50	35	10.5	1.5	52	67	50	78	190
80	40	16	90	R17	93	M20×1.5	12	50	36	47	11	20	72	63	40	11.5	2.5	66	86	60	95	210
100	40	20	110	R21	114	M20×1.5	16	60	41	55	11	25	89	71	50	12.5	2.5	76	96	70	115	230


TC

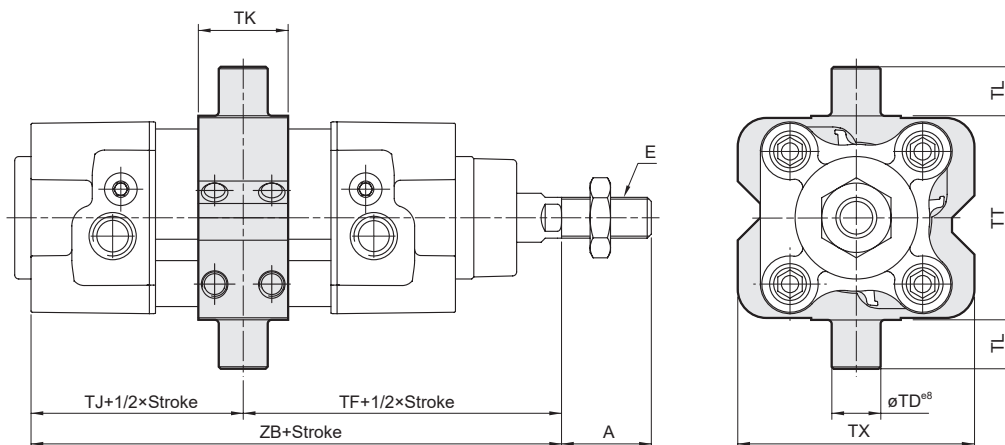

TA

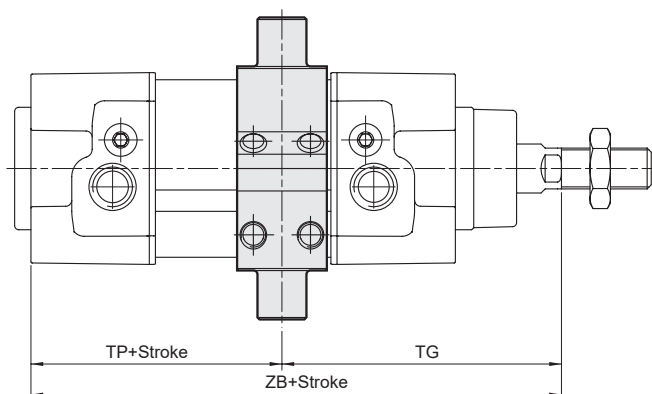


TB

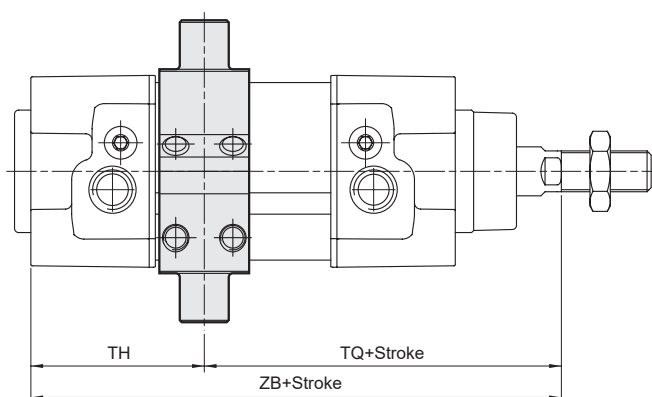


Code Tube I.D.	A	E	TD	TF	TG	TH	TJ	TK	TL	Without magnet			Magnet			TT	TX
										TP	TQ	ZB	TP	TQ	ZB		
32	22	M10×1.25	12	73	70.5	44.5	47	22	12	49.5	75.5	120	79.5	105.5	150	50	58
40	24	M12×1.25	16	82.5	81	51	52.5	28	16	54	84	135	84	114	165	63	70
50	32	M16×1.5	16	90	87	50	53	32	16	56	93	143	86	123	173	75	85
63	32	M16×1.5	20	97.5	90.5	53.5	60.5	35	20	67.5	104.5	158	97.5	134.5	188	90	100
80	40	M20×1.5	20	110	104.5	58.5	64	40	20	69.5	115.5	174	109.5	155.5	214	110	120
100	40	M20×1.5	25	120	113.5	62.5	69	45	25	75.5	126.5	189	115.5	166.5	229	132	145

Y connector


$\phi 32 \sim \phi 40$

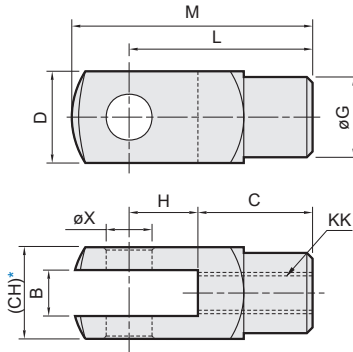

$\phi 50 \sim \phi 100$

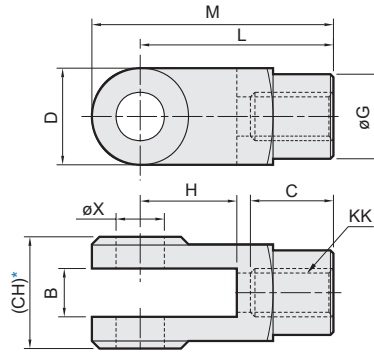

I connector

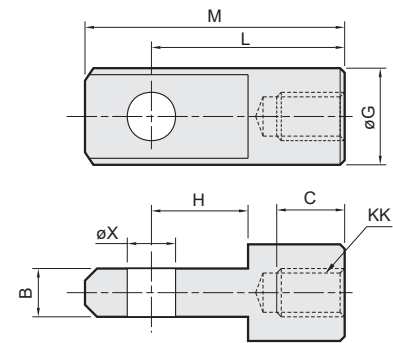


* Please do not take the sand casting plate as the mounting plate, because we do not machine it.
If you have this special demand, please contact our sales representative.

Code	B		C		CH		D		G		H		KK		L		M		X ^{H9}
Tube I.D.	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	Y	I	
32	10 ^{+0.5} _{+0.15}	10 ^{-0.1} _{-0.2}	20	17	19	—	19	—	$\phi 18$	$\phi 20$	20	15	M10×1.25	40	40	52	52	$\phi 10$	$\phi 10$ ^{+0.04} ₀
40	12 ^{+0.5} _{+0.15}	12 ^{-0.1} _{-0.2}	24	21	22	—	22	—	$\phi 20$	$\phi 24$	24	18	M12×1.25	48	48	62	62	$\phi 12$	$\phi 12$ ^{+0.04} ₀
50	16 ^{+0.3} _{+0.1}	16 ^{-0.1} _{-0.3}	28	23	32	—	32	—	$\phi 28$	$\phi 32$	32	32	M16×1.5	64	64	89	86	$\phi 16$	$\phi 16$ ^{+0.04} ₀
63	16 ^{+0.3} _{+0.1}	16 ^{-0.1} _{-0.3}	28	23	32	—	32	—	$\phi 28$	$\phi 32$	32	32	M16×1.5	64	64	89	86	$\phi 16$	$\phi 16$ ^{+0.04} ₀
80	20 ^{+0.3} _{+0.1}	20 ^{-0.1} _{-0.3}	33	30	45	—	40	—	$\phi 36$	$\phi 36$	40	40	M20×1.5	80	80	100	108	$\phi 20$	$\phi 20$ ^{+0.05} ₀
100	20 ^{+0.3} _{+0.1}	20 ^{-0.1} _{-0.3}	33	30	45	—	40	—	$\phi 36$	$\phi 36$	40	40	M20×1.5	80	80	100	108	$\phi 20$	$\phi 20$ ^{+0.05} ₀

PIN


S

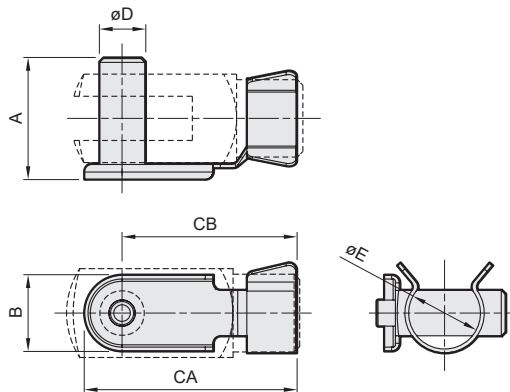

for floating pin

Code	A	B	CA	CB	D ^{d9}	E
Tube I.D.						
32	26	14	45	38	$\phi 10$ ^{-0.04} _{-0.07}	17
40	31	16	54	46	$\phi 12$ ^{-0.05} _{-0.09}	19
50,63	42	20	70	60	$\phi 16$ ^{-0.05} _{-0.09}	27
80,100	56	30	91	76	$\phi 20$ ^{-0.06} _{-0.11}	35


P



for Y & I connector

Code	A	B	C	D ^{d9}	DA	E	F	Split pin
Tube I.D.								
32	30	25	3.5	$\phi 10$ ^{-0.06} _{-0.09}	14	3.2	1	3.2×20L
40	37	30	5	$\phi 12$ ^{-0.06} _{-0.09}	16	3.2	1	3.2×20L
50,63	47	37	7	$\phi 16$ ^{-0.05} _{-0.09}	22	4	1	4×25L
80,100	62	50	8	$\phi 20$ ^{-0.06} _{-0.11}	30	5	1.5	5×35L

P

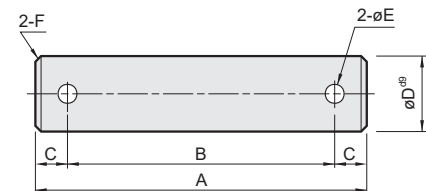

for CA & CB

Code	A	B	C	D ^{d9}	E	F	Split pin
Tube I.D.							
32	69	55	7	$\phi 10$ ^{-0.05} _{-0.09}	4	1.0	4×20L
40	76	62	7	$\phi 12$ ^{-0.05} _{-0.09}	4	1.0	4×20L
50	84	70	7	$\phi 12$ ^{-0.05} _{-0.09}	4	1.0	4×20L
63	94	80	7	$\phi 16$ ^{-0.05} _{-0.09}	4	1.0	4×30L
80	117	100	8.5	$\phi 16$ ^{-0.05} _{-0.09}	5	1.5	5×30L
100	137	120	8.5	$\phi 20$ ^{-0.05} _{-0.09}	5	1.5	5×35L