

How to order

SPJ10N – L B6 – M4F

① ② ③ ④

① Model ② Vacuum port direction ③ vacuum port Connection

SPJ10N **Nil** –Vertical
 L –Lateral

B6 – Pagoda fitting $\phi 6$ hose
R1 – Rc1/8 Female thread

④ Mounting thread

M4F – M4 Female thread **M9M** – M9×1 Male thread
M6F – M6 Female thread **M10M** – M10×1 Male thread
M8F – M8 Female thread **M16M** – M16×1.5 Male thread
M8M – M8×1 Male thread

◇ Note: Please refer to page 228 for suction cup selection.




Selection

Model	Vacuum port connection	Mounting thread
SPJ6-8	B6	M9M
	LB6	M4F
SPJ10-20	B6	M8M
	LB6	M6F
SPJ30-50	B6	M10M
	LB6	M6F
SPJ60-80	R1	M16M
	LR1	M8F

Dimensions(mm)


Vertical direction connection - Pagoda fitting

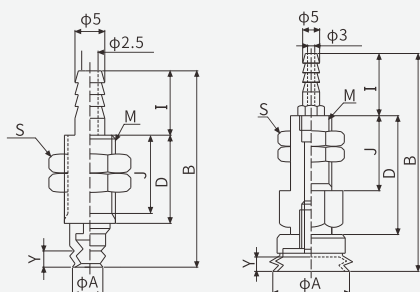


Model/ Size	A	B	D	I	J	M	Y	S
SPJ6-B6-M9M	6	33	14	10	11	M9×1	4.2	12
SPJ8-B6-M9M	8	33	14	10	11	M9×1	4	12
SPJ10-B6-M8M	10	47.5	22	16	17	M8×1	3	12
SPJ15-B6-M8M	15	49	22	16	17	M8×1	3.3	12
SPJ20-B6-M8M	20	51	22	16	17	M8×1	5.5	12
SPJ25-B6-M10M	25	63.5	32	16	22	M10×1	6.5	14
SPJ30-B6-M10M	30	66	32	16	22	M10×1	7	14
SPJ35-B6-M10M	35	66	32	16	22	M10×1	7	14
SPJ40-B6-M10M	40	66	32	16	22	M10×1	7.2	14
SPJ50-B6-M10M	50	68	32	16	22	M10×1	9	14
SPJ60-R1-M16M	60	62	42	-	23	M16×1.5	8	21
SPJ70-R1-M16M	70	63	42	-	23	M16×1.5	9.5	21
SPJ80-R1-M16M	80	63	42	-	23	M16×1.5	9.5	21

Dimensions(mm)


Lateral direction connection - Pagoda fitting

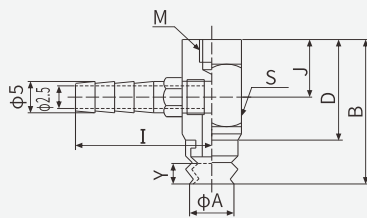

Suction cup diameter: 6-8

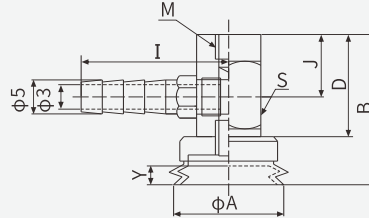

Suction cup diameter: 10-50

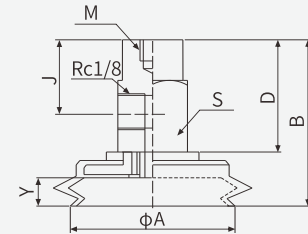

Suction cup diameter: 60-80

Model/ Size	A	B	D	I	J	M	Y	S
SPJ6-LB6-M4F	6	31	22	21	14	M4Depth6	4.2	10
SPJ8-LB6-M4F	8	31	22	21	14	M4Depth6	4	10
SPJ10-LB6-M4F	10	31.5	22	21	14	M4Depth6	3	10
SPJ15-LB6-M4F	15	33	22	21	14	M4Depth6	3.3	10
SPJ20-LB6-M4F	20	35	22	21	14	M4Depth6	5.5	10
SPJ25-LB6-M6F	25	47.5	32	23	20	M6Depth8	6.5	14
SPJ30-LB6-M6F	30	50	32	23	20	M6Depth8	7	14
SPJ35-LB6-M6F	35	50	32	23	20	M6Depth8	7	14
SPJ40-LB6-M6F	40	50	32	23	20	M6Depth8	7.2	14
SPJ50-LB6-M6F	50	52	32	23	20	M6Depth8	9	14
SPJ60-LR1-M8F	60	62	42	-	28	M8Depth8	8	21
SPJ70-LR1-M8F	70	63	42	-	28	M8Depth8	9.5	21
SPJ80-LR1-M8F	80	63	42	-	28	M8Depth8	9.5	21

SB
SBA
SBB
SBF
SBOF
SFT
SFA
STP
SBL
SBLP
SBS
SF
SU
SUF
SFG
SFU
STC
SFF
SFM
SDM
SHT
SOFA
SOB
SOF
SOG
SFP
SBP
SXP
SGP
SDL
SH
SHB
SZ
SAN
SAO
SPA
SPC
SPF
SPJ
SPU
SNP
SOP