

How to order

SPU30N – L B6 – M4F

①

②

③

④



① Model ② Vacuum port direction ③ Vacuum port connection

SPU30N **Nil** – Vertical **B6** – Pagoda fitting $\phi 6$ Hose
 L – Lateral **R1** – Rc1/8 Female thread

④ Mounting thread

M4F – M4×0.7 Female thread **M8M** – M8×1 Male thread
M6F – M6×1 Female thread **M10M** – M10×1 Male thread
M8F – M8×1.25 Female thread **M14M** – M14×1 Male thread
 M16M – M16×1.5 Male thread


Selection

Model	Vacuum port connection	Mounting thread
SPU10-15	B6	M8M
	LB6	M4F
SPU20-35	B6	M10M
	LB6	M6F
SPU40-50	B6	M14M
	LB6	M8F
SPU60-100	R1	M16M
	LR1	M16M


◇ Note: Please refer to page 237 for suction cup selection.

Dimensions(mm)


Vertical direction connection –Pagoda fitting

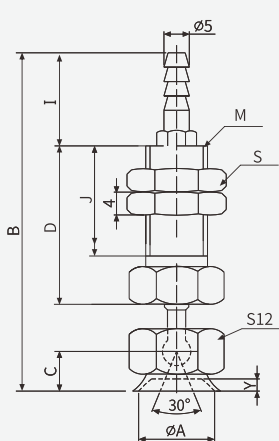

Suction cup diameter 6-8

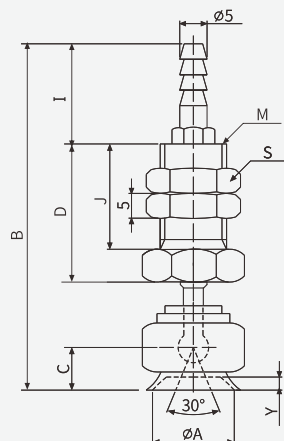

Suction cup diameter 10-50

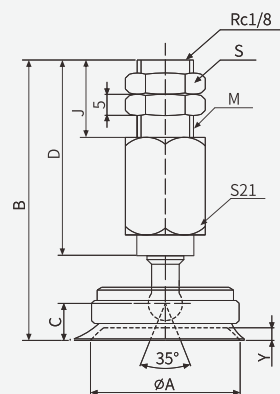


Suction cup diameter 60-100


Model/ Size	A	B	C	D	I	J	M	Y	S
SPU10-B6-M8M	10	50.5	5	22	16	17	M8×1	1	12
SPU15-B6-M8M	15	51.5	6	22	16	17	M8×1	1.4	12
SPU20-B6-M10M	20	70	9	22	16	22	M10×1	2	14
SPU25-B6-M10M	25	70.5	9.5	32	16	22	M10×1	2.5	14
SPU30-B6-M10M	30	71	10	32	16	22	M10×1	2	14
SPU35-B6-M10M	35	72	11	32	16	22	M10×1	3	14
SPU40-B6-M14M	40	76.5	11	32	16	22	M14×1	3	17
SPU50-B6-M14M	50	77.5	12	32	16	22	M14×1	4	17
SPU60-R1-M16M	60	78.2	16	40	—	23	M16×1.5	5	21
SPU80-R1-M16M	80	80.2	18	40	—	23	M16×1.5	6	21
SPU100-R1-M16M	100	80.2	18	40	—	23	M16×1.5	6	21

Dimensions (mm)


Lateral direction connection–Pagoda fitting

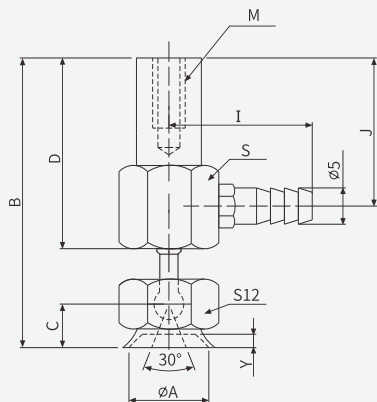

Suction cup diameter 10–15

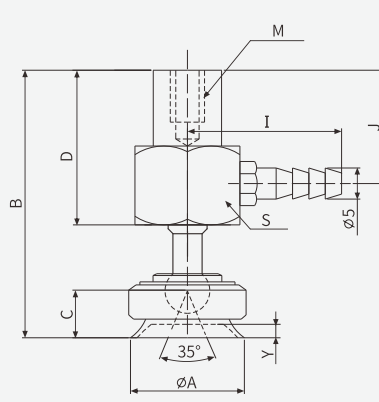

Suction cup diameter 20–50

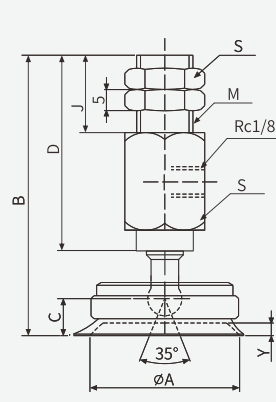

Suction cup diameter 60–100

Model/ Size	A	B	C	D	I	J	M	Y	S
SPU10-LB6-M4F	10	34.5	5	22	21	14	M4 Depth 6	1	10
SPU15-LB6-M4F	15	35.5	6	22	21	14	M4 Depth 6	1.4	10
SPU20-LB6-M6F	20	54	9	32	23	20	M6 Depth 8	2	14
SPU25-LB6-M6F	25	54.5	9.5	32	23	20	M6 Depth 8	2.5	14
SPU30-LB6-M6F	30	55	10	32	23	20	M6 Depth 8	2	14
SPU35-LB6-M6F	35	56	11	32	23	20	M6 Depth 8	3	14
SPU40-LB6-M8F	40	60.5	11	32	23	20	M6 Depth 8	3	14
SPU50-LB6-M8F	50	61.5	12	32	23	20	M6 Depth 8	4	14
SPU60-LR1-M16M	60	78.2	16	40	—	23	M16×1.5	5	21
SPU80-LR1-M16M	80	80.2	18	40	—	23	M16×1.5	6	21
SPU100-LR1-M16M	100	80.2	18	40	—	23	M16×1.5	6	21

SB

SBA

SBB

SBF

SBOF

SFT

SFA

STP

SBL

SBLP

SBS

SF

SU

SUF

SFG

SFU

STC

SFF

SFM

SDM

SHT

SOFA

SOB

SOF

SOG

SFP

SBP

SXP

SGP

SDL

SH

SHB

SZ

SAN

SAO

SPA

SPC

SPF

SPJ

SPU

SNP

SOP